



# INSTALLATION

## GRAN-THROWOVER SADDLEBAGS

## 4171

### PARTS INCLUDED

- 1 Pair of Saddlebags
- 2 Velcro Strap w/Clip
- 4 Adjustable Strap
- 1 Cable Lock
- 2 Rain Covers
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.**

#### WARNING

**THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.**

#### NOTICE

**This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.**

#### NOTICE

**IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.**

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

#### STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

#### WARNING

**YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.**

#### WARNING

**PREVENT SERIOUS INJURIES AND/OR DEATH! NEVER EXCEED THE MANUFACTURER'S RECOMMENDED LOAD LIMITS FOR YOUR MOTORCYCLE! BE SURE THE SADDLEBAGS DO NOT COME INTO CONTACT WITH ANY MOVING PARTS. ALWAYS CHECK FOR PROPER CLEARANCE BEFORE RIDING!**

#### WARNING

**PREVENT POTENTIAL SERIOUS INJURY! ENSURE ALL SADDLEBAG FASTENERS AND STRAPS ARE SECURE BEFORE RIDING THE MOTORCYCLE.**

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
  - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
    - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
  - Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



kuryakyn.com

**RECOMMENDATIONS**

- The saddlebags fit either over or under the passenger seat, see PIC.1 and PIC.2. The saddlebags can be positioned with the narrow wedge end facing either forward or backward, depending on the best fit for your application.
- Use the adjustable straps and the Velcro clip straps to secure the saddlebags to your motorcycle. Küryakyn recommends securing the saddlebag to the passenger footpeg, or the frame. **DO NOT** secure the saddlebags to the swingarm or any other part that moves independently from the seat. Be sure that the straps will not become tangled in any moving parts before riding.
- The width between the tops of the saddlebags is adjustable, allowing the bags to fit many applications, see PIC.3. Separate the Velcro flaps and reposition to adjust the width. Be sure that the width between the saddlebags is not so loose that a saddlebag could get caught under the fender or in the wheel. Always check for proper clearance before riding.
- The saddlebags are equipped with multiple steel D-rings allowing you to get the best fit for your application. Slide the steel D-rings into the elastic pockets when not in use to eliminate rattling due to vibration, see PIC.3. Slide the cable lock through the D-rings to secure the saddlebags to your motorcycle, see PIC.4.





**AFTER INSTALLING THE SADDLEBAGS, BE SURE TO CHECK FOR PROPER CLEARANCE BETWEEN THE BAG AND ANY MOVING PARTS, INCLUDING THE WHEELS AND SWING ARM. NEVER PLACE THE ANCHORING STRAPS NEAR THE WHEELS OR BRAKE CALIPERS. BE SURE THE PLACEMENT OF THE SADDLEBAGS DOES NOT INTERFERE WITH SAFE OPERATION OF THE MOTORCYCLE.**



**The saddlebags have heat-resistant shields but we do not recommend placing the bags near exhaust pipes. Be sure to maintain proper clearance away from exhaust pipes.**

**FEATURES**

- The included rain gear stows in its own pocket at the narrow wedge end of each saddlebag. An expanding drink holder is also located on the narrow wedge end of each saddlebag, see PIC.5.
- Each saddlebag has a large exterior side pocket and hidden expansion panels. Unzip the panels for more room inside the bags, see PIC.6.
- Interior pockets make storing and finding small items easy. The top zippered flap also has both the interior and exterior pockets, see PIC.7.

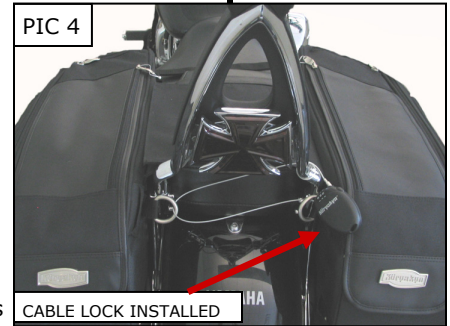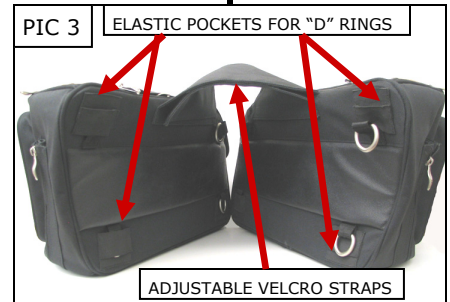

-cont.-

**RETRACTABLE CABLE LOCK OPERATION**

**STEP 1** See PIC.8. To select a new combination for the lock, press button "A" and hold down. Push the cable end (labeled as "B") down/inward until you hear it click.

**STEP 2** Choose your new combination by turning the three tumblers (labeled as "C") to a three-digit combination that you will remember. Then pull back up on the cable end to set your combination.

**NOTE: Make sure you record the chosen combination and keep in a safe place. ONCE THE LOCK COMBINATION IS SET, IT CANNOT BE RESET WITHOUT THE PREVIOUS COMBINATION.**

**STEP 3** Press down on the "A" button to pull the cable end out. Plug the cable end into the cable lock receptacle (labeled as "D") until you hear it click into the locked position. If you have too much slack in the cable, press the "A" button to recoil the slack amount of cable. Turn the tumblers to a position that is **NOT** your chosen combination to lock the mechanism.

**STEP 4** To unlock, turn the tumblers to your chosen combination and press the "E" button to release the cable and the "A" button to recoil the cable.

