

# INSTALLATION INSTRUCTIONS



# UNLEASH.

THE SMARTEST PERFORMANCE TUNING TECHNOLOGY

**QS4 USB** STANDALONE QUICK SHIFT

**KAWASAKI Z125 PRO | 2017  
Q4415**

## 1 > READ

### WARNINGS > INSTALLING



- We strongly suggest that an experienced technician install this product.
- Read through all instructions before beginning installation.
- This document is intended for use by qualified technicians.
- This is not a replacement for the factory Engine Control Unit (ECU).
- Refer to a factory service manual for more specific stock component identification/location information and removal/assembly procedures.

### WARNINGS > USING



- Use only in race or other closed-course applications and never on public roads.
- Z-Fi products are not certified by the California Air Resource Board (CARB) for use on CA highways.

### GETTING HELP



- Factory support is available in the US at 909-597-8300.
- For fastest support outside of the US, find your local importer at [bazzaz.net](http://bazzaz.net).


# 2>IDENTIFY

## INCLUDED PARTS

1. QS4-USB control unit
2. QS4-USB harness
3. Shift Switch and mounting hardware
4. USB cable
5. Swingarm stickers
6. Download Bazzaz software from [bazzaz.net/index.php/software-overview](http://bazzaz.net/index.php/software-overview)

## QS4 HARNESS

1. Ground
2. +12v Switch Power
3. Main
4. Speed
5. Shift Switch
6. Coils
7. Neutral

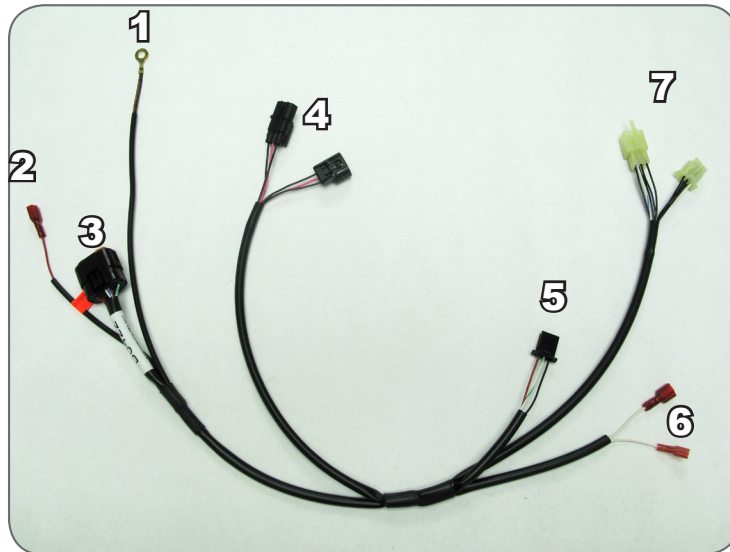

# 3>REMOVE

1. Rider and passenger seat
2. Both black side fairings




# 4>SECURE

1. The Bazzaz control unit will be secured beneath the rider seat in front of the battery.

# 5>CONNECT


## 5.1

1. Connect the Bazzaz QS4 harness to the control unit and begin routing the harness through the middle of the bike along the frame rail.
2. Locate the factory green terminal on the coil.
3. Disconnect the factory coil connector and install the Bazzaz coil connector inline.

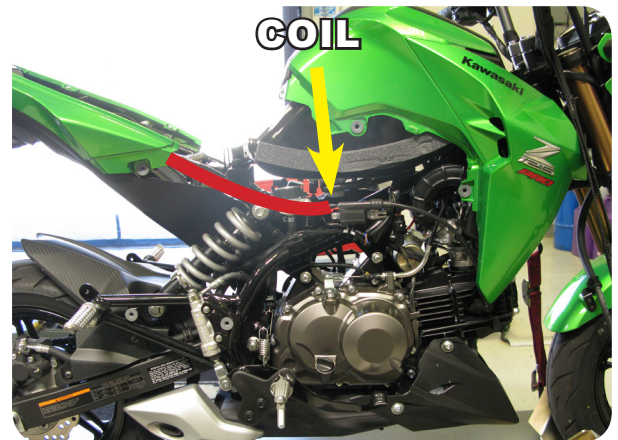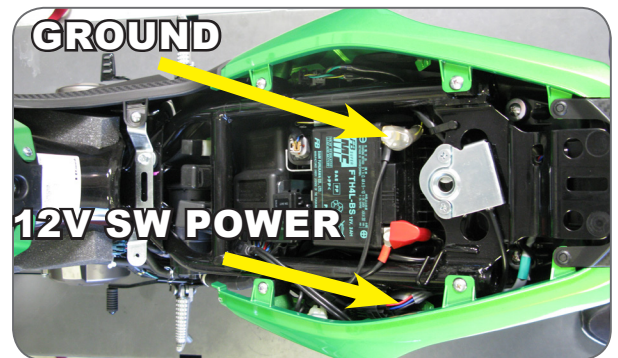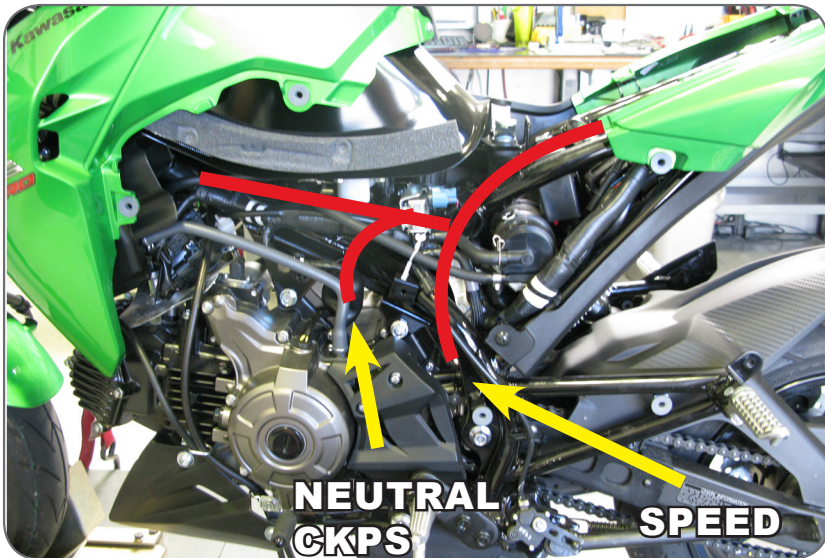

## 5.2


1. Locate the factory black rubber boot, which contains the CKPS connector and the neutral connector.
2. Disconnect the factory two pin CKPS connector and install the Bazzaz inline.

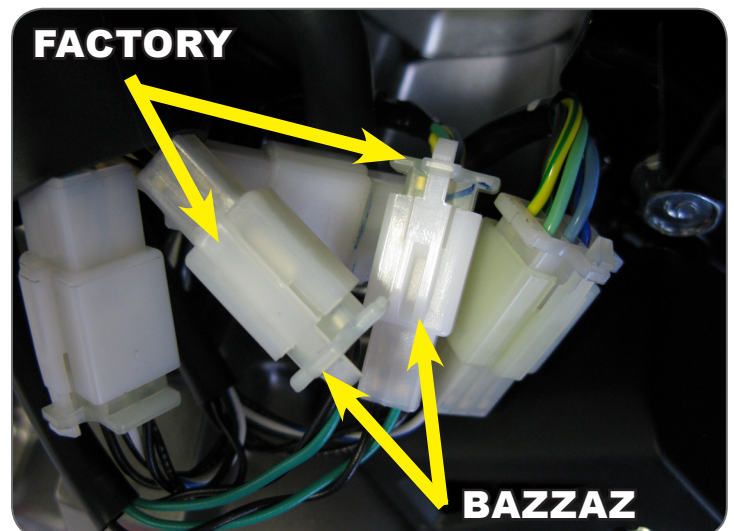

# 5>CONNECT (CONT.)


## 5.3

1. Locate the factory 6 pin neutral connector within the same black rubber boot that contains the CKPS connector.
2. Disconnect the factory neutral sensor connector and install the Bazzaz neutral connector inline.

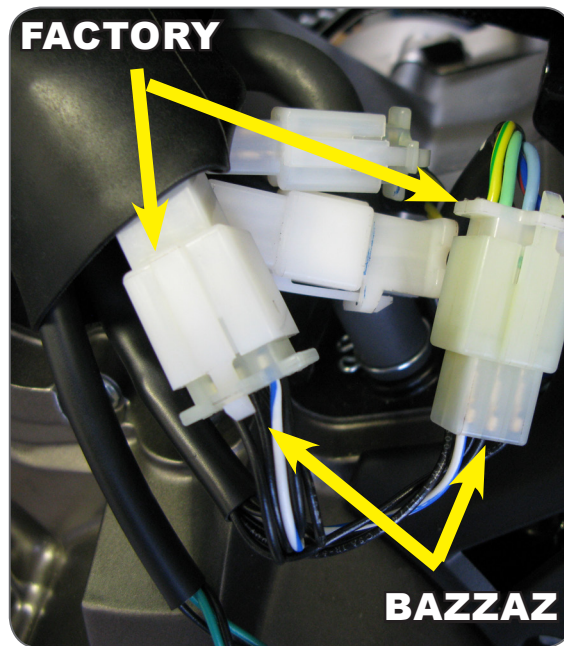

## 5.4


1. Locate the factory blue speed sensor connector, which can be found on the back of the motor near the chain just above the swing arm pivot.
2. Disconnect the factory blue speed sensor connector and install the Bazzaz speed sensor connectors inline.

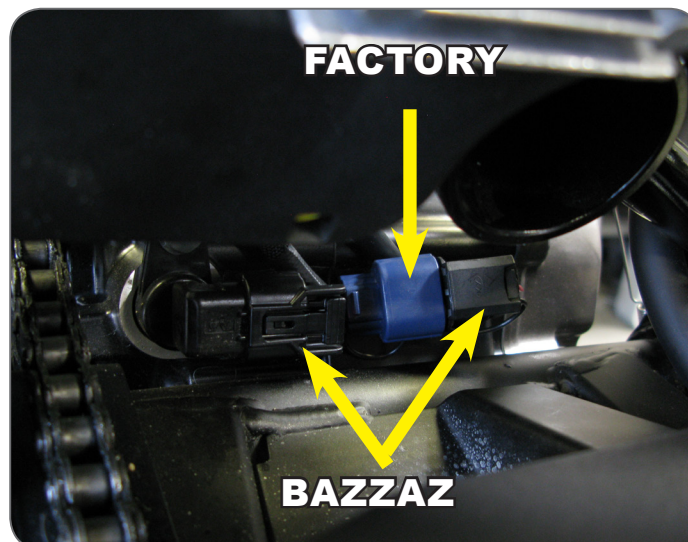

# 5>CONNECT (CONT.)


## 5.5

1. Locate the Bazzaz ground lug and install the Bazzaz onto the negative ground post of the battery.

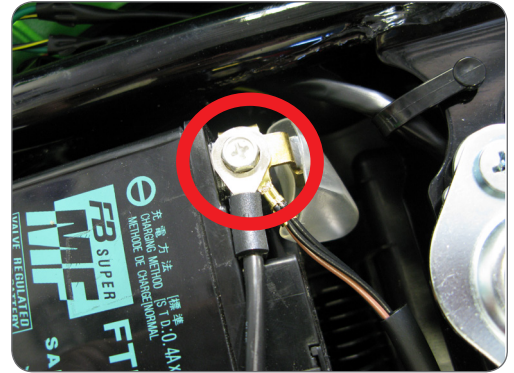

## 5.6

1. Locate the factory three wire taillight connector, which can be found on the left hand side of the bike within the tail section.
2. Separate the factory red wire and use the supplied scotchlok to crimp onto the factory red wire.
3. Connect the Bazzaz switched power connector.

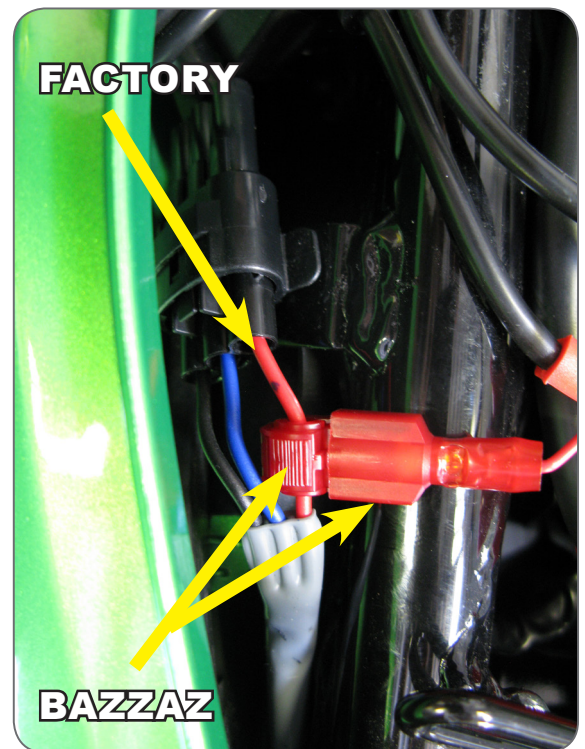

# 6>QUICKSHIFT

**\*\*Aftermarket rearsets are required for Quickshift function\*\***

1. Measure and note your shift pedal height so you may reposition the shift lever once complete.
2. Remove the factory shift rod and begin to install the Bazzaz shift switch using one of the supplied allen stud bolts and tighten.
3. Begin to install the Bazzaz shift rod. \*The shift rod may need to be cut to get your original shift pedal height.\*
4. Ensure to retighten all lock nuts on the shift linkage.

# 7>SECURE



Use the supplied cable ties to secure the harness neatly along the routing path **free of any moving or hot components (which could cause damage or failure of the system).**



# 8>CHECK



1. In order to check that the system is installed correctly, download the Bazzaz Z-Fi Mapper software at [bazzaz.net](http://bazzaz.net).
2. Plug the USB cable into the control unit and computer.
3. Locate and open the Z-Fi Mapper software.
4. Check that the pre-programmed map matches the model of your bike on the fuel map page within the software. You can switch from map 1 to map 2 by unplugging the map select jumper on the Bazzaz fuel harness. Map 1 will be pre-programmed; depending on your model, there may be a pre-programmed map in the map 2 slot. If map 2 is blank, stock ECU settings are used. Make sure that the jumper is left plugged in or unplugged, depending on which map you choose.
5. Start the vehicle and begin to check that the following inputs read correctly on the fuel map page.
  - RPM - Make sure that the RPM is reading near what the vehicle is idling at.
  - GPS - The vehicle should read neutral (or whichever gear it is in). For motorcycles that use a Gear Position Sensor, the bike does not need to be running to do this. For motorcycles that use a speed sensor, the wheel must be spinning to read gear properly. This can be checked on a dynamometer or by using a rear stand. Use caution when testing componentry.
  - TPS - When throttle is applied, the TPS should read accordingly. Fly-by-wire models must be running to check TPS. Normal cable operated throttles can be checked with just the key on, not running.

## Also use software to:

- View and/or make adjustments to fuel maps
- Activate Z-AFM self mapper (sold separately)
- Save and load new fuel maps
- Re-calibrate throttle position sensor after throttle modifications
- View diagnostics for troubleshooting
- Change quickshift settings
- Make traction control adjustments

# 8>CHECK (CONT.)



If any problem is found, please carefully follow through the installation steps again.



If problem still persists, please contact Bazzaz tech support

- Factory support is available in the US at 909-597-8300.
- For fastest support outside of the US, find your local importer at [bazzaz.net](http://bazzaz.net)

# 9>REINSTALL

After it is determined that everything is correct, reinstall the components removed in step 3.

# 10>NEXT LEVEL

\*\*Accessories purchased separately.

## SHIFT LIGHT

Illuminates white to identify pre-determined, optimal shift points.

Used to improve forward drive and momentum for faster drag passes and lap times.

Comes pre-programmed with suggested values that can be easily adjusted as desired.

\*For use with the QS4 USB stand-alone quick shift only.



**\$129.99**



**THE SMARTEST PERFORMANCE TUNING TECHNOLOGY**



Proudly made in the  
**United States**

**Q4415**