



4 Point harness mounting instructions for Wolfman Small Tank Bags  
 Wolfman Enduro Tank Bag, Sloped Tincup Base, and Flat Tincup Base  
 (Enduro Pocket and Small Expedition Tank Bag-Discontinued)

Thank You for your purchase.



Fig.1A-Enduro Tank Bag



Fig.1B-Tincup Sloped Tank Base

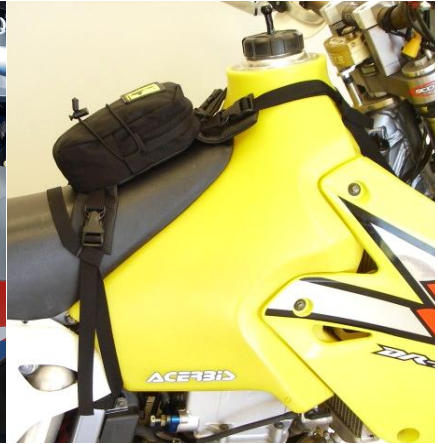


Fig.1C-Enduro Pocket

All the bags mentioned use the same method to attach to your motorcycle.

**\*\*Before you begin, make sure your gas tank and bag are free of dirt and grime. If you have a painted tank, we recommend you wash and wax. Also clean the frame tubes, and underside of frame behind the steering tube. \*\***

1. The Wolfman Enduro Tank Bag, Tincup Sloped Tank Base and Enduro Pocket mounted correctly. Fig.1 A, B, & C

**The front harness Fig.2**

The front harness consists of: 1-long 3/4" webbing strap, 1-short elastic keeper, 2-3/4" Rock Lockster male buckles.

Fig.2 Front harness

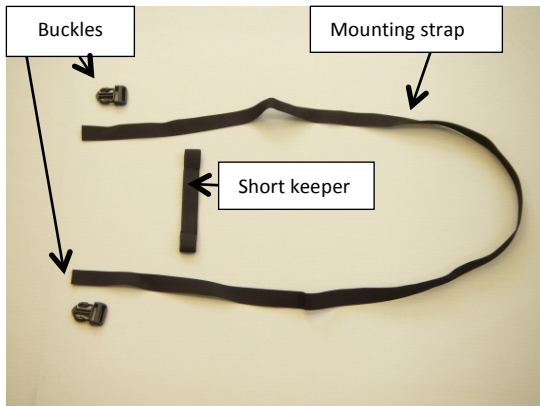


Fig.3




2. Unclip the front harness from the Tank bag or Base. Separate one 3/4" buckle from the mounting strap and pull the webbing through the elastic keeper. Set the front harness on the tank, pass the mounting strap under the frame, behind the steering tube (see arrow), thread through the elastic keeper and buckle. Fig.3 & 4  
 Make sure not to pinch any wires or hoses.

Fig.4 Top view



Fig.5 Rear harness

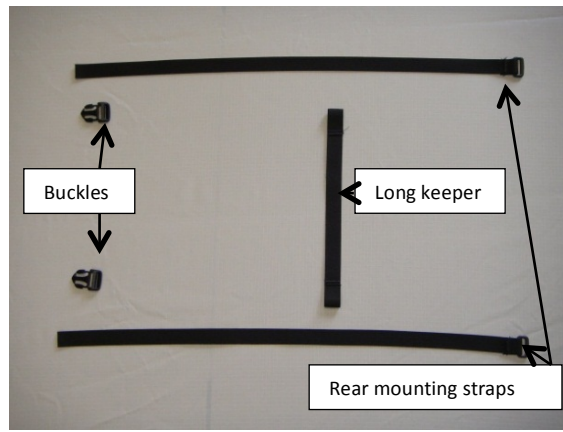

**The rear harness** Fig.5

The rear harness consists of: 2-23"X 3/4" Mounting straps, 1-Long elastic keeper, 2-3/4" Rock Lockster buckles.

4. Unthread the 2- 3/4" male buckles from the 2-23" long mounting straps from the elastic keeper.

5. Thread the cut end of the rear mounting strap around each of the frame tubes, on both sides of the bike. Thread as close to the lower edge of the side panel as possible. Fig.6

Fig.6



Fig.7




6. Thread the cut end through the rectangle sewn at the opposite end and pull tight to secure the webbing around the frame. Repeat for opposite side. Fig.7

Fig.8



Fig.9

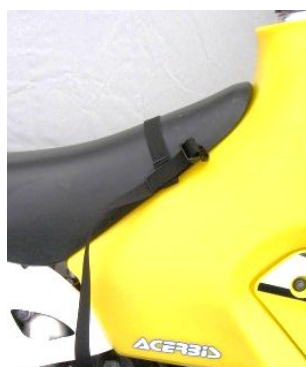

7. Thread the cut ends of the rear mounting straps through the openings on each end of the long elastic keeper, and then, thread on the 3/4" Rock Lockster buckles. Fig.8 & 9

Use the keeper! (On most Enduro/dual sport bikes when removing the bag from the bike the keeper will keep the mounting straps from melting on the exhaust header pipe).

**\*\* Hint** (For a really clean look, you can place the keeper between the seat and the gas tank, however, you may have to remove the seat to do this).

8. Place the Tank Bag or Base on the tongue of the seat just behind the gas cap. By placing the bag behind the gas cap, you will not have to remove to fill up.

Fig.10



Fig.11



9. Connect the front and rear harnesses to The Tank Bag or Base. Tighten snug. Fig.10 & 11

\*\*Helpful hint: If your straps are too long, they can be cut to length. Leave at least 4 to 6 inches of webbing to adjust. (If you cut too much off no worries as this is a replaceable item in our accessories.)

10. If you have any questions, please give us a call. 1-800-535-8183 or 303/651-6022

[www.wolfmanluggage.com](http://www.wolfmanluggage.com)

Ride safe and enjoy!