



LIGHTED CURVED VERTICAL SIDE MOUNT PLATE with BRAKE LIGHT

9252

PARTS INCLUDED

- 1 Lighted Curved Vertical Side Mount License Plate Holder with Brake Light
- 1 Hardware Kit, Including,
 - 4 4" Black Nylon Cable Ties
 - 1 Dielectric Grease Pack
 - 4 Female T-Tap Scotch Lock Connectors
 - 4 Male Connectors
 - 1 1" X 3" Foam Adhesive Tape
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED

Torque wrench (ft/lbs), Set of Sockets, Set of Combination Wrenches, Set of Hex Wrenches, Tin Snips, Test Light, Wire Crimper

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

NOTE:The lighted side mount license plate holder is compatible with any model but you must order the correct splined mount to meet your specific needs (sold separately).

NOTE:The following installation instructions assume that you have already installed the appropriate splined adapter for your specific application.

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge.

Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025.

Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights



ATTENTION! Your local ordinances may have specific requirements on the approved angle of the plate mount. Be sure the license plate is at the approved angle and meets all local ordinances.

ATTENTION! The brake light on the license plate holder is not intended to function as the main brake light, it is meant only to be an accent accessory. Be sure your main brake light is functional before operating your motorcycle.

WARNING! THE ADDITION OF A SIDE-MOUNTED LICENSE PLATE MAY AFFECT CORNERING CLEARANCE IN SOME SITUATIONS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

STEP 2 Remove the four Allen screws from the back of the license plate assembly. Install your license plate into the assembly and fasten the Allen screws. You may need to trim your plate with tin snips for a perfect fit.

STEP 3 Place the splined section of the license plate assembly over the splined adapter; adjust the angle of the license plate assembly and secure with the fastener that was supplied with your splined adapter. Be sure the plate assembly does not interfere with the shock absorber or other components on the motorcycle and that there is sufficient clearance for the passenger foot peg. **Torque the fastener to 20 ft/lbs.**, ensuring that the splines on the mount mesh properly with the splines on the backing plate.

STEP 4 Locate the main wiring harness running to the rear fender. Use a test light, or refer to the factory service manual to identify which wire performs the run function and which wire performs the brake function of the taillight and which wire is the ground wire. Mark these wires for reference.

STEP 5 Route the plate assembly wiring harness to the stock wiring harness. Keep the wiring harness clear of moving parts and high temperature parts (belt, wheel, swing arm pivot, etc.).

ATTENTION! Secure all wiring away from any moving parts, pinch points or extreme heat. Küryakyn **WILL NOT** issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

CAUTION! Avoid potential electrical shock! Disconnect the battery before starting this procedure.

ATTENTION! Küryakyn recommends the use of dielectric grease on electrical connections.



-cont.-

STEP 6 Refer to FIG.1 below to make the correct electrical connections. Install one of the supplied Female T-Tap connectors to the running light wire determined in Step 4. PIC 1 Install one of the supplied Male connectors to the **RED** wire from the Plate light and plug it into the Female T-Tap on the running light wire. PIC 2, FIG 1

STEP 7 Install one of the supplied Female T-Tap Connectors to the brake light wire determined in Step 4. PIC 1, FIG 1 Install one of the supplied Male Connectors to the **WHITE** wire from the Plate light and plug it into the Female T-Tap on the brake wire. PIC 2, FIG 1


STEP 8 Install one of the supplied Female T-Taps to the ground wire determined in Step 4. PIC 1 Install one of the supplied Male Connectors to the **BLACK** wire from the Plate Light and plug it into the Female T-Tap on the ground wire. PIC 2, FIG 1

STEP 9 Secure the plate assembly wiring harness using the supplied cable ties. Reconnect the battery cables and test the license plate assembly and taillight for proper function.

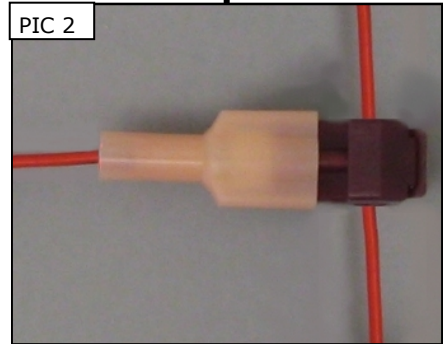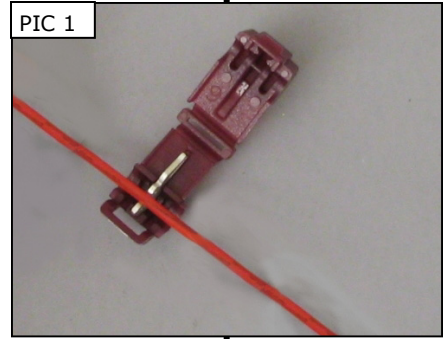

NOTE: If the license plate rattles in the frame, install the supplied self-adhesive tape to the inside of the back plate then re-install the license plate. This should eliminate the rattle.

WARNING! ENSURE PROPER LIGHT OPERATION BEFORE RIDING THE MOTORCYCLE. VISIBILITY IS A MAJOR CONCERN FOR MOTORCYCLISTS. A LIGHT MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY.

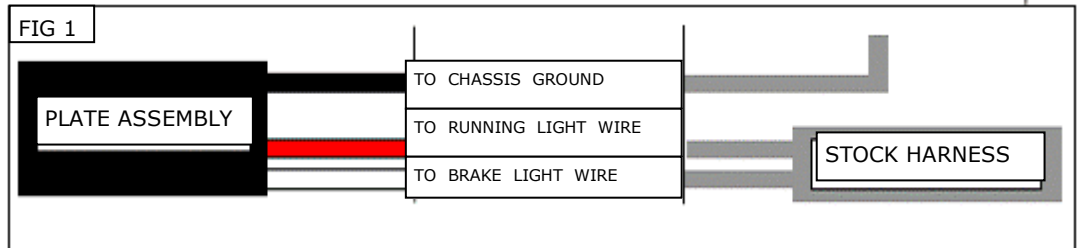

ATTENTION! Secure all wiring away from any moving parts, pinch points or extreme heat. Küryakyn **WILL NOT** issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.