


stockton

TOOL COMPANY™

DIGITAL GAUGE SHOCK PUMP


PART:320375

Please remove the battery insulation sheet before use (FIG1)



Button Functions:


1. Button "A" controls Power/Change Units (PSI-BAR-KG/CM²)
2. Automatic On Function- When connected to a valve, the pump will automatically turn on when the pressure is above 5 PSI.

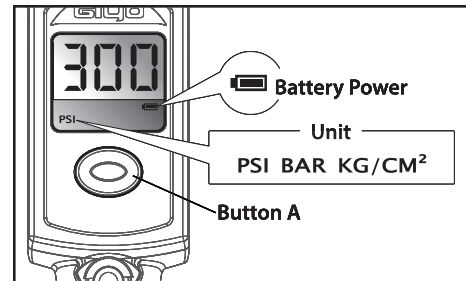

Battery Replacement:

1. Unscrew the 4 screws on the back of the gauge.
2. Lift out the gauge cap.
3. Remove the digital gauge.
4. Open the battery cap and replace with a new 3V (CR2032) battery. The positive pole of the battery should face the battery cap.

Please make sure the O-ring in the bottom of the gauge is still there when replacing the battery and the LCD gauge.

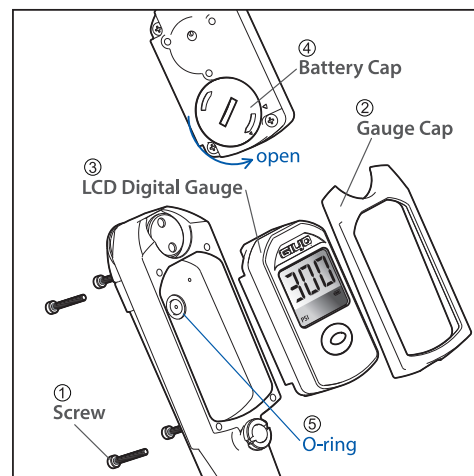

Trouble Shooting:

If your gauge shows unusual digits, press and hold the "A" button for 9 seconds. This will reset the gauge.

