



OVERLAND SLING™

MOUNTING INSTRUCTIONS




NOTE: Failure to follow recommended mounting and installation instructions voids warranty. Manufacturer is not liable for any damage, injury or death that results from improper use and installation of products. By installing these products, user accepts all liabilities, terms and conditions outlined in the Liability & Warranty statement included here.

INSTALLATION

1 Adjust center anchor strap, running on one side or the other of center mounts or obstacles. Position J-hook in center of tread and bottom side release buckle so it's not on the corner edge of tire. Tension strap and secure extra webbing with strap keeper (or trim to length leaving 12" or more for easy installation, singe webbing end with lighter to prevent fraying).

2 Crisscross straps behind tire in an X pattern, going above or below center mount or other obstacles. Position side release buckles in center of tire tread on bottom for easy access to tension and re-tension as needed. Secure excess webbing (or trim if desired).


3 Tension all straps. Check anchor straps after driving a few miles and re-tension if needed as loads compress and shift.

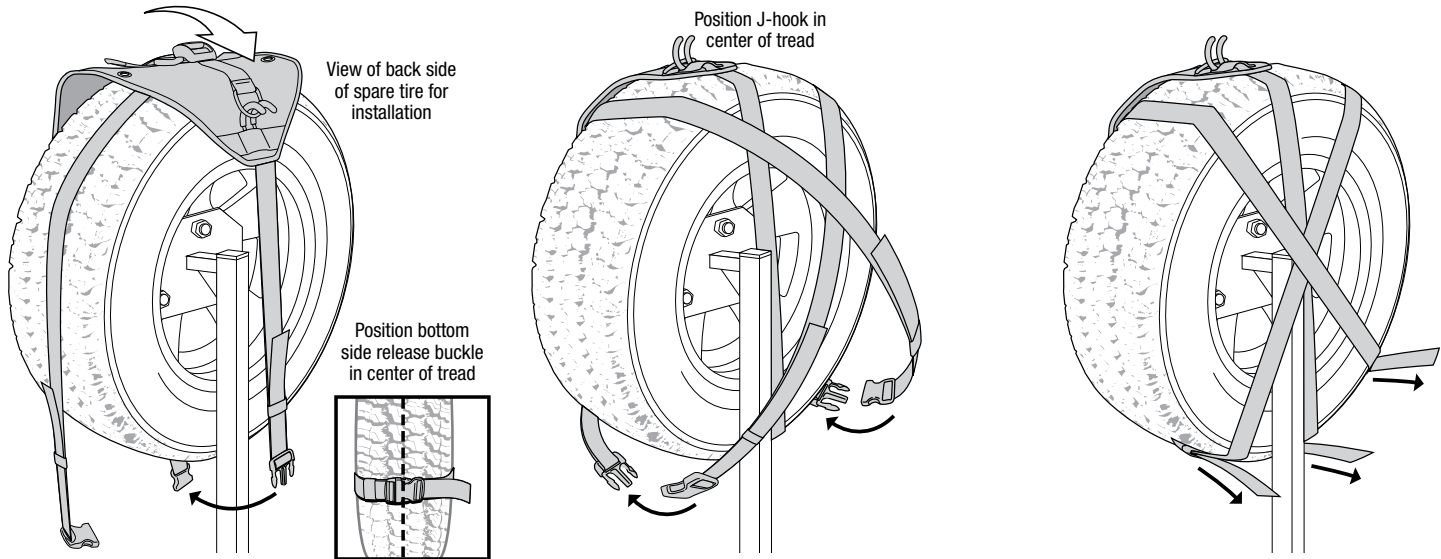

SECURING GEAR


Secure the Cactus Canteen and Armadillo Bag by hanging on J-hook with bag tucked into the pocket. Buckle straps through daisy chain webbing and secure center strap. Cactus Canteen and Armadillo Bag can be filled, burped or fitted with pour spout while suspended from J-hook.

Pocket flap can be tucked into pocket to create second open pocket, or it can be fully or partially closed with hook-and-loop to accommodate tools and other essentials.

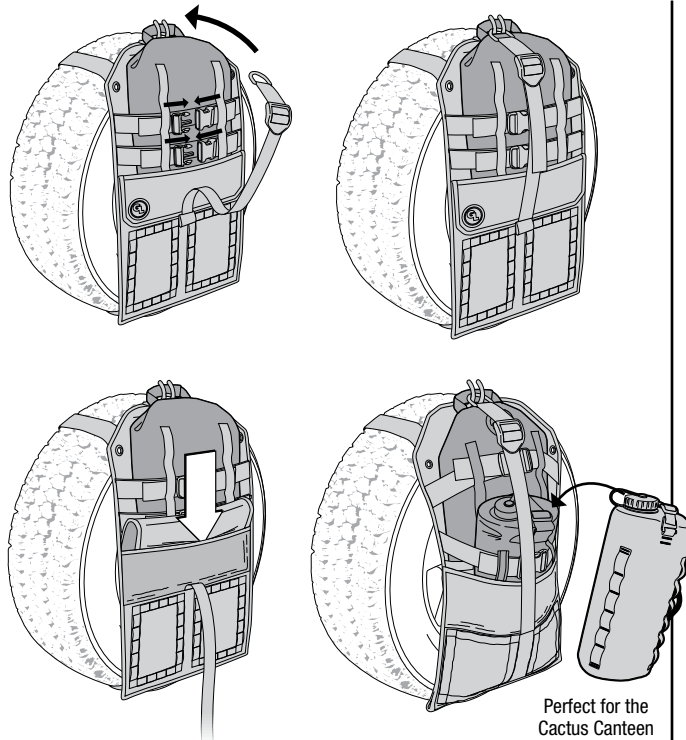

EXCESS WEBBING

The Overland Sling is designed to fit over tires up to 40". Extra webbing can be managed in the layered or rolled method as shown below. Or, if you do not plan to mount the Sling on a larger tire, cut extra webbing, leaving at least 12" and singe ends with lighter to prevent fraying.

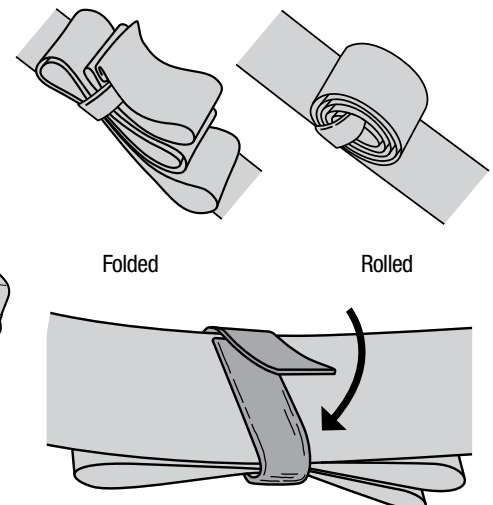

After gathering extra webbing, secure with the sewn-in hook-and-loop tabs.




TIP: Recovery gear, traction ramps and other essentials also can be secured to the spare tire with the Overland Sling.



Always keep anchor straps **TIGHT**. After mounting, ride for a short distance then stop and re-tension all straps, as gear compresses and shifts. If you notice wear and abrasion on any anchor strap, re-position strap in a different location, checking to make sure there are no sharp edges. **KEEP STRAPS TIGHT TO PREVENT DAMAGE!**


HOSE ACCESS

For quick access to drinking and wash water, shower attachment and other water hoses with universal quick connect can be routed through drain holes at bottom of Sling.

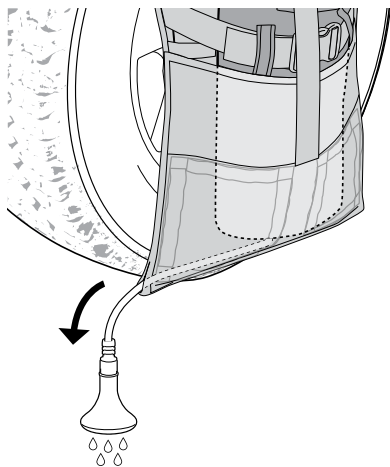


THEFT DETERRENT

Thread GL's 82" QuickLoop security cable through one or both metal grommets and loop through wheel to deter the "grab and dash" thief.

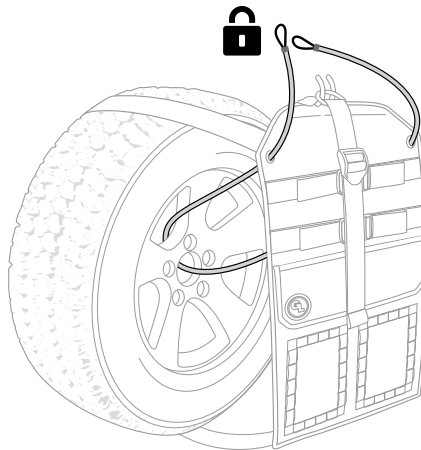

SHOW YOUR PATCHES



Customize your Overland Sling with hook-and-loop patches by folding or tucking pocket flap to expose hook fabric.

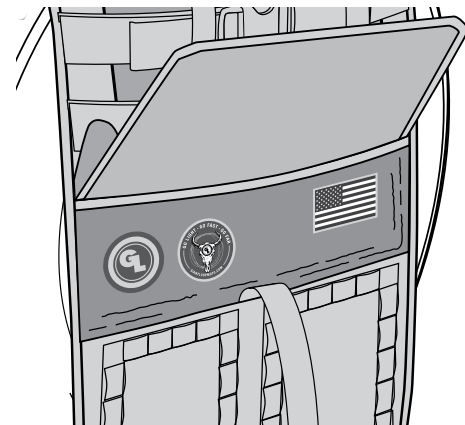

TIP: Use a pressure washer or hose nozzle to remove mud and dirt. Air dry. Use vinyl cleaner to preserve and enhance appearance.

CUSTOMIZE FOR YOUR EXPEDITION

Giant Loop's waterproof Possibles Pouches and Rogue or Revelstoke Dry Bags can be secured to the webbing MOLLE-style panels using included straps or Pronghorn or Cinch Straps.

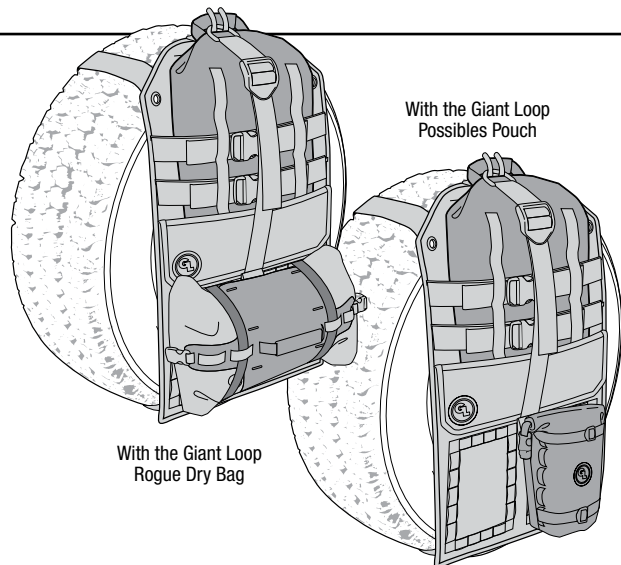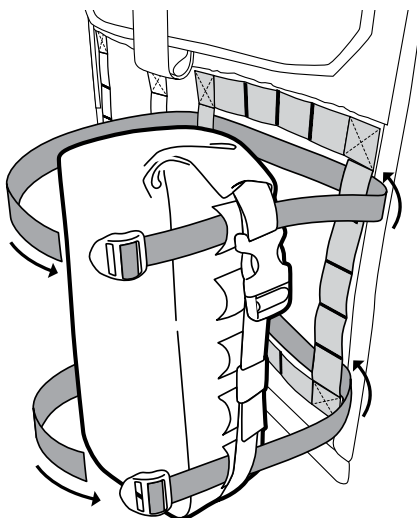


With the Giant Loop Possibles Pouch

With the Giant Loop Rogue Dry Bag

RECOMMENDED OPTIONAL ACCESSORIES

Possibles Pouch™

Straps to MOLLE-style panels, creating 3.5-liter waterproof, quickly accessible external pockets. Available with First Aid or GL graphics.




Rogue Dry Bag™

Straps to MOLLE-style panel, providing 17 liters of 100% waterproof storage, with access from both ends.




Armadillo Bag™

Flexible, collapsible, lightweight, utility bladders for the safe transport of liquid hydrocarbon products, available in 1, 2, 3 and 5-gallon sizes.

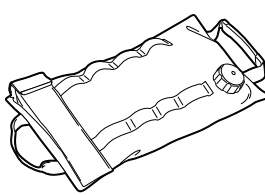


Cactus Canteen™

Transport drinking and wash water in a rugged, collapsible container weighing just ounces. Available in 1, 2, 3 and 5-gallon sizes.



84" QuickLoop Security Cable™

Add peace of mind by locking gear to vehicle.



See giantloopmoto.com/warranty for complete warranty details.



NOTE: Before mounting, carefully read through these instructions. Failure to follow recommended mounting instructions voids warranty. Manufacturer is not liable for any damage, injury or death that results from improper use and installation of products. By installing this product, user accepts all liabilities, terms and conditions outlined in the Liability & Warranty statement included here.

