



Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation. Your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime, etc. where the product mounts. It is the rider's responsibility to make sure the product is mounted and secure before each use. Loading the bag may result in a change of position. Always check for proper mounting position after loading and before each and every ride.


WARNING: Ensure exhaust gases exit past the saddlebags. Hot parts and exhaust gases can melt saddlebags. Allow a minimum distance of 1" from all hot parts

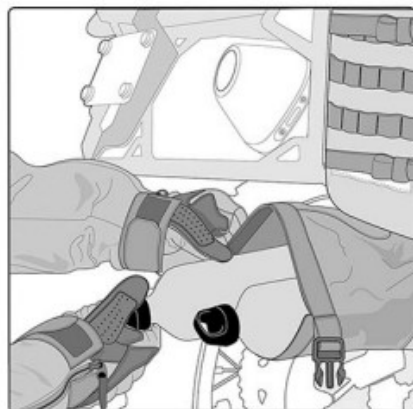


7. Place tools or bottles in lower pocket making sure nothing leaks.

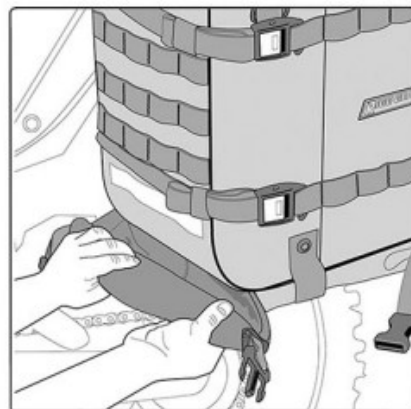


8. To close the underside pocket, roll a minimum of 3 half turns. Its recommended to roll up towards the saddlebag.

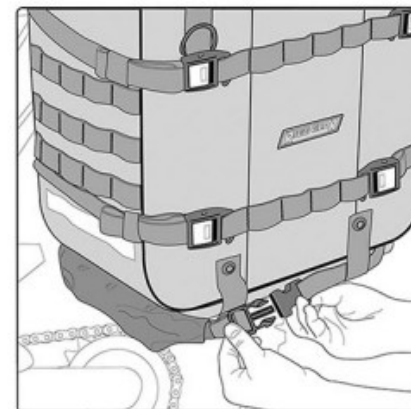

9. Connect side straps as shown

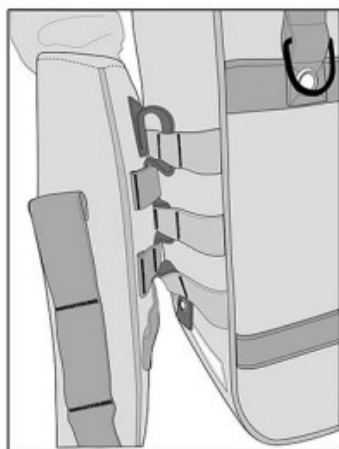

10. When attaching optional MOLLE accessories such as our RiggPak, be sure to weave the MOLLE strips through the webbing on the bag and the

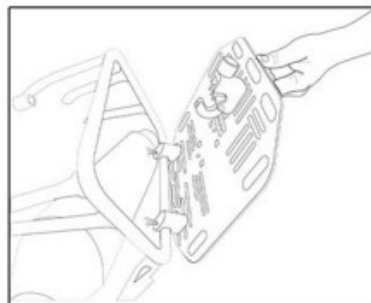

We also have a quick release mounting plate that allows you to mount and dismount your bags from your bike in just seconds. Please visit our website or scan this QR code for more information.



THIS PRODUCT CONTAINS:
2 Removable waterproof liners
2 50" long saddlebag connecting straps

You Tube

To watch a video on how to install these bags and for other mounting options, please visit our website or scan this QR code for more information.



accessory as shown.



Warning

Read the installation instructions and make yourself familiar with the process of installing the Rigg Gear product(s) on your vehicle. It is your responsibility to install the product(s) correctly and securely as outlined in these instructions. Rigg Gear products must not be overloaded or over tightened. Max weight limit is 25lbs per bag. Failure to adhere to these warnings may result in, but not limited to, the product becoming detached, becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) could lead to serious injury.

Always drive safely. Always wear a helmet and protective apparel.

3518 W Lake Center Drive, Ste. A Santa Ana, CA 92704 USA
Tel (714)850-1811 E-mail: info@nelsonrigg.com www.nelsonrigg.com

