



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT




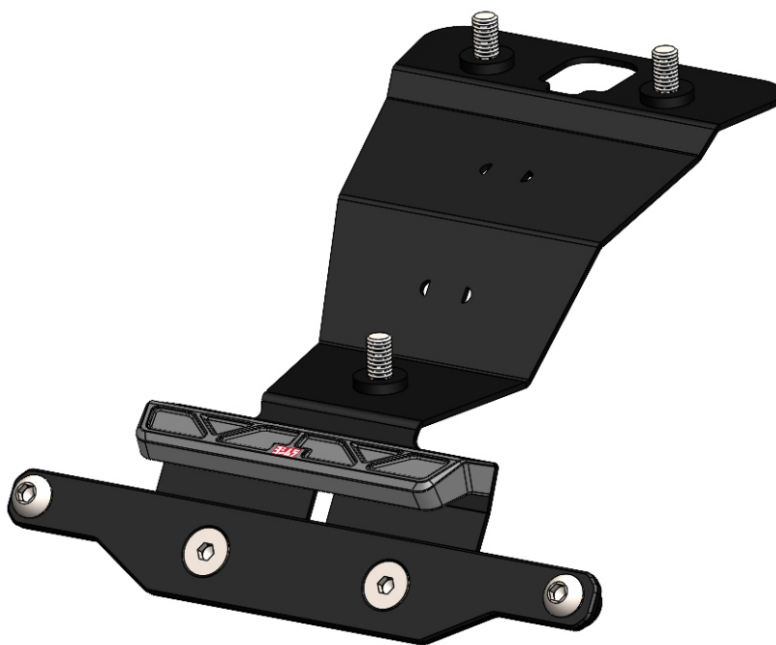


075BG123410
Honda CRF300L




THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



<div><div>x1</div><div></div><div>12341-FEBKT1 Fender Eliminator Bracket</div></div>	<div><div>x1</div><div></div><div>FE-LP-BKT License Plate Bracket</div></div>	<div><div>x1</div><div></div><div>075BG-LH-H6 License Plate Light</div></div>	
<div><div>x3</div><div></div><div>M6X14BHS 6mm x 14mm Button Head Screw</div></div>	<div><div>x4</div><div></div><div>M6X10BHS 6mm x 10mm Button Head Screw</div></div>	<div><div>x2</div><div></div><div>M6X12FS-SS 6mm x 12mm Flat Head Screw</div></div>	
<div><div>x2</div><div></div><div>M4X6BHS 4mm x 6mm Button Head Screw</div></div>	<div><div>x2</div><div></div><div>6MMWASHER-SS Stainless Washer</div></div>	<div><div>x2</div><div></div><div>6MMLN-SS Nylon Lock Nut</div></div>	<div><div>x2</div><div></div><div>ZT-400 Cable Tie</div></div>

Assembly Diagram

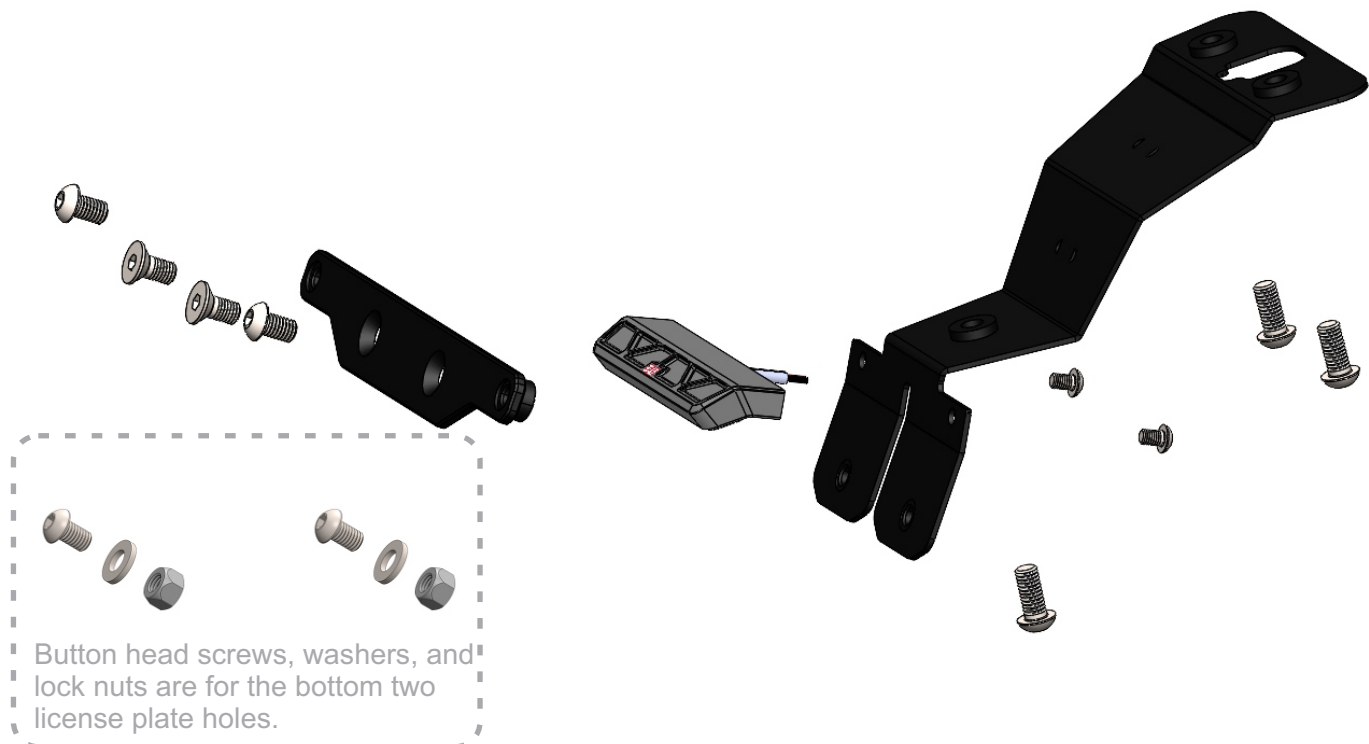

IMPORTANT NOTE:

This kit does not include turn signal brackets to install OEM or aftermarket turn signals.


Ensure you have all necessary components prior to beginning installation.

Removal


1. Using the Owners/ Service Manual remove the seat and upper rear fender to gain access to the license plate connector and fender bolts.
2. Locate and disconnect the license plate light.
3. While securely supporting the stock fender assembly, remove the three bolts securing the fender assembly to the subframe. Carefully remove the stock fender assembly making sure not to damage connectors in the process.

Installation


1. Install *075BG-LH-H6*, license plate light onto *12341-FEBKT1*, fender eliminator bracket using *M4X6BHS*, 4mm button head screws.

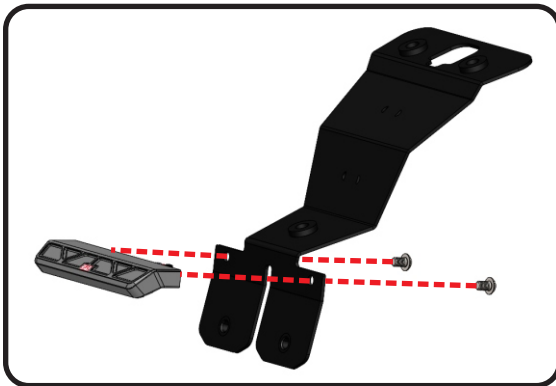

2. Secure and install *12341-FEBKT1*, fender eliminator bracket to the subframe using the provided *M6X14BHS*, 6mm button head screws.

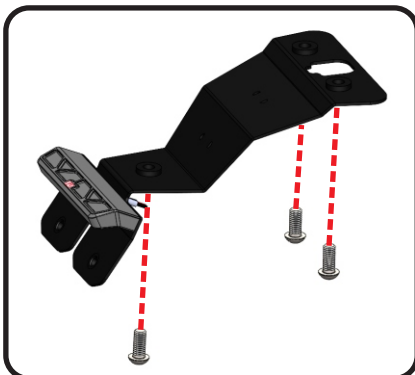

3. Install *FE-LP-BKT*, license plate bracket using the *M6X12FS-SS*, flat head screws.

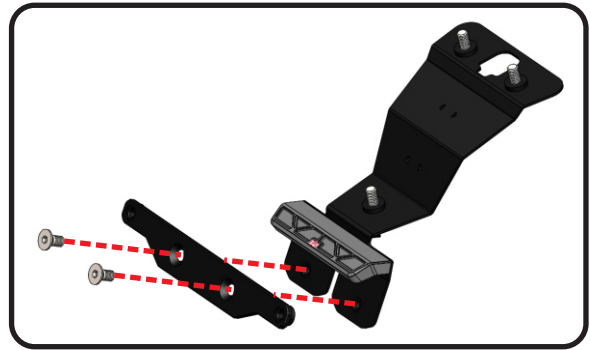

Note: *M6X10BHS*, button head screws will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMLN-SS*, nylon lock nuts and *6MMWASHER-SS*, stainless washers are for the bottom license plate holes.

4. Route license plate light wires through the hole in *12341-FEBKT1*, fender eliminator bracket and through the lower rear cowl. Re-connect license plate light.
5. Re-install all components in opposite steps of removal.
6. Check for proper function of license plate light and that all brackets and components are secure prior to riding.