




SHOCK & AWE® 3.0 ENGINE KIT

- WARNING** This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.
- CAUTION** This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.
- ATTENTION** This indication alerts you to the fact that if you ignore this detail you will affect the performance or functionality of the product.

All Ciro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation. Read completely and understand the instructions prior to starting installation.

NOTE: Ciro products are designed and manufactured under very strict quality control. Ciro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a limited lifetime warranty against LED failure. Ciro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed, unmodified and maintained. Ciro will not be liable for any consequential and incidental damages, including labor, or non-Ciro products. Please visit Ciro3d.com for our complete warranty policy.

Included Items:

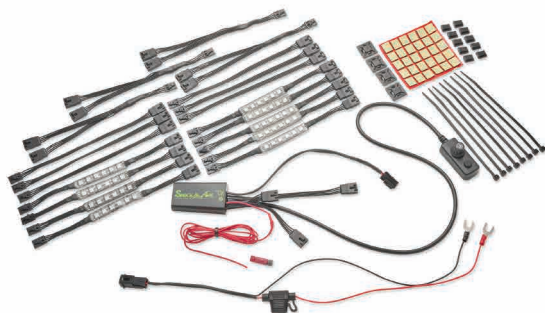

Operation Instructions:

1. To turn the Shock & Awe®3.0 lights on at the controller, press and release the power button. This will return you to the last used mode.
2. To access the controller with the app, the controller must either be in the **on** or **standby mode**. This will allow you full access to all Shock & Awe 3.0 functions including turning the lights on and off. **It is important to note that standby mode will still have a low-level drain on your battery.**
3. To manually turn your lights off at the controller and place the controller in standby mode, press and release the power button. Standby mode is still accessible by the app. **Whether you go into standby mode manually or from the app, the controller is still on and there is a low-level drain on the battery.**
4. To turn off the lights and the controller, press and hold the power button for 3 seconds until the lights flash red 3 times. Once the controller is turned off it can only be turned on by pressing the power button. The app will not be able to connect to the controller when it is in off mode. **This mode will not have any affect on battery draw.**
5. Within the app if the low voltage protection is turned on and the lights and controller are automatically turned off by the app, you will need to turn the controller back on manually via the power button.
6. To enter next mode press the mode button, then use the dial to change that mode.

MODES:

Intensity
Flash
Color
Breathe
App Memory

DIAL CHANGES:

Brightness: use app to change color
Speed of flash
21 color options
Speed of interval
Last app setup



For all motorcycle specific and universal install instructions visit ciro3d.com or scan QR code to go directly to Shock & Awe® 3.0 page for more information, videos and to download the app.

FCC STATEMENT Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.